

Oklahoma Gas and Electric Company ©

UNDERGROUND STANDARD Version I - AUG 2021

U773.6

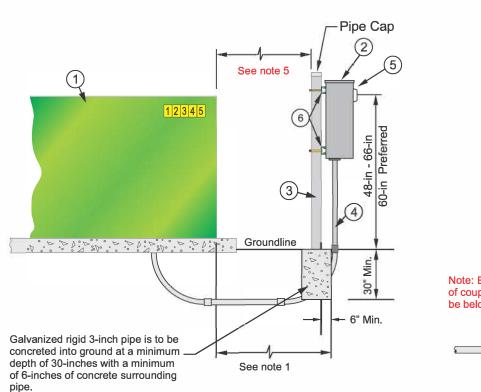

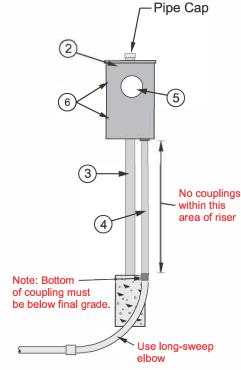

ITEM Number	DESCRIPTION	FURNISHED BY		INSTALLED BY	
		O.G.&E.	CONSUMER	O.G.&E.	CONSUMER
1	Transformer	Х		Х	
2	CT Meter Base	х			Х
3	3-inch Galvanized Rigid pipe set in concrete		Х		Х
4*	Metering Conduit 1-inch sch 40 or rigid		Х		Х
5	Meter	Х		Х	
6	1 5/8-inch Kindorf and Clamps		Х		Х

^{*} Riser and elbows to be galvanized steel if in hazardous or high impact areas.

Notes

ISSU

2018 |

SEPT

SUPERSEDES

- 1. Metering to be on free-standing structure adjacent to transformer pad. CT wiring not to exceed 20 feet in total length.
- 2. Place cap on top of pipe to keep moisture from inside of pipe to prevent deterioration.
- 3. Pipe to be galvanized rigid 3-inch pipe. Pipe to be set at a minimum depth of 30-inches with a minimum of 6-inches of concrete surrounding pipe.
- 3. In order for the meter to be accessible for operation and maintenance, a minimum of 5 feet clearance from all obstructions must be maintained in front of the meter.
- Refer to U16 for proper identification and marking.
- 5. Allow sufficient clearance between transformer and meter rack to open transformer door fully.
- OG&E equipment not to be used for customer grounding.

CT METERING COMPONENTS **INSTALLATION INSTRUCTIONS**

ONE CUSTOMER AND CT'S IN TRANSFORMER THREE-PHASE ONLY