


The following is a suggested configuration for meter bases for overhead and underground meters in residential and commercial applications. OGE Energy Corp., its subsidiaries and affiliates, disclaim any and all liability for the construction or maintenance practices relating to such suggested configuration. Each individual, company, or entity engaging the work associated with this configuration bears full responsibility for its, his, or her own occupational training, and compliance with all applicable local, state, and national laws and regulations. The configuration is not intended to replace the training, know-how, or instruction that may be needed for safe construction or maintenance.

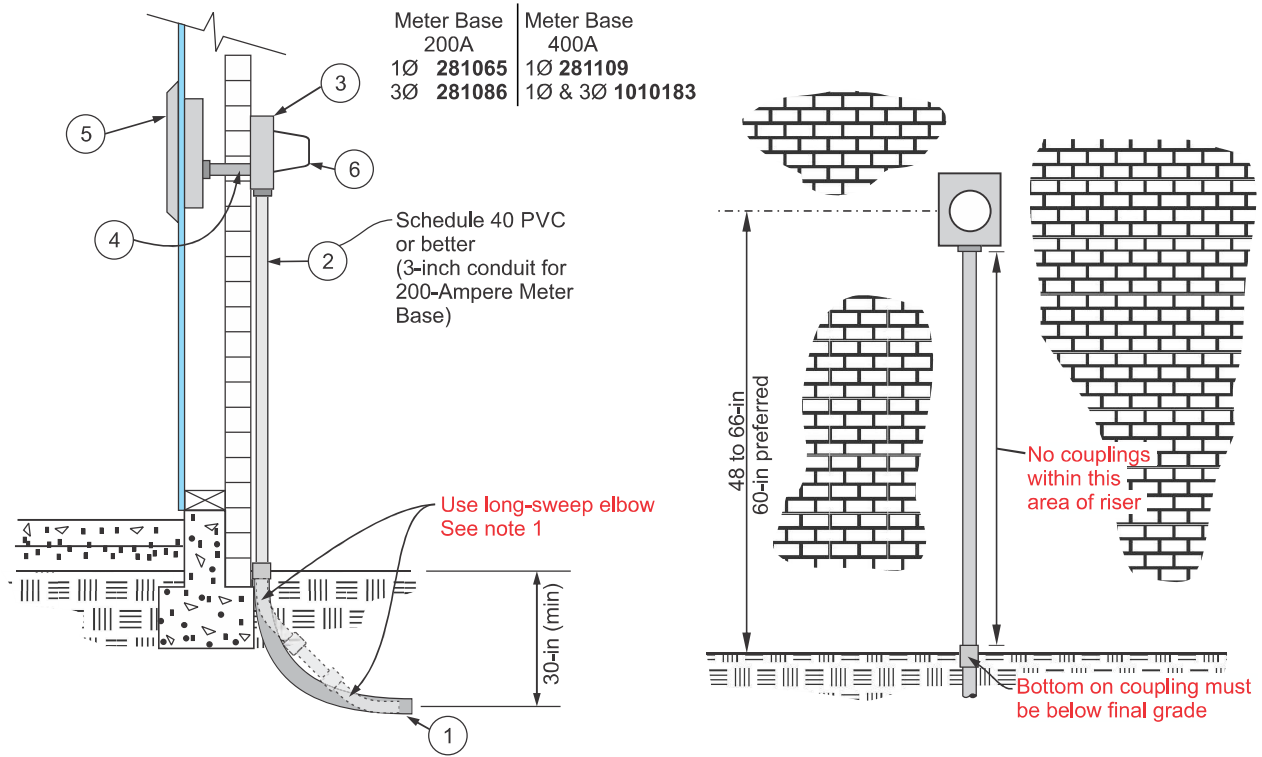

ITEM NUMBER	DESCRIPTION	FURNISHED BY		INSTALLED BY	
		O.G.& E.	CONSUMER	O.G.& E.	CONSUMER
1	Service Lateral	X		X	
2	Service Lateral Raceway		X		X
3	Meter Base	X			X
4	Service Raceway		X		X
5	Service Equipment		X		X
6	Meter	X		X	
*7	Grounding Electrode & Grounding Electrode Conductor		X		X

* Not Shown

Notes:

- When foundation obstructions exist, the use of schedule 40 (minimum) conduit with (2) 45-degree elbows to clear obstructions is permissible. The top 45-degree elbow is to be below ground level.
- OG&E equipment is to be installed on outside surface of structure and is not to be recessed.
- Refer to U16 for proper identification and marking.
- OG&E equipment not to be used for customer grounding.


**METER INSTALLATION
FOR SELF-CONTAINED SINGLE PHASE OR THREE PHASE METER
208Y/120 OR 240Δ /120 OR 240/120 VOLTS
400-AMPERES MAXIMUM**

APPROVED Signatures on File
SUPERSEDES OCT 2020 ISSUE

The following is a suggested configuration for meter bases for overhead and underground meters in residential and commercial applications. OGE Energy Corp., its subsidiaries and affiliates, disclaim any and all liability for the construction or maintenance practices relating to such suggested configuration. Each individual, company, or entity engaging the work associated with this configuration bears full responsibility for its, his, or her own occupational training, and compliance with all applicable local, state, and national laws and regulations. The configuration is not intended to replace the training, know-how, or instruction that may be needed for safe construction or maintenance.

APPROVED Signatures on File

SUPERSEDES JUN 2005 ISSUE

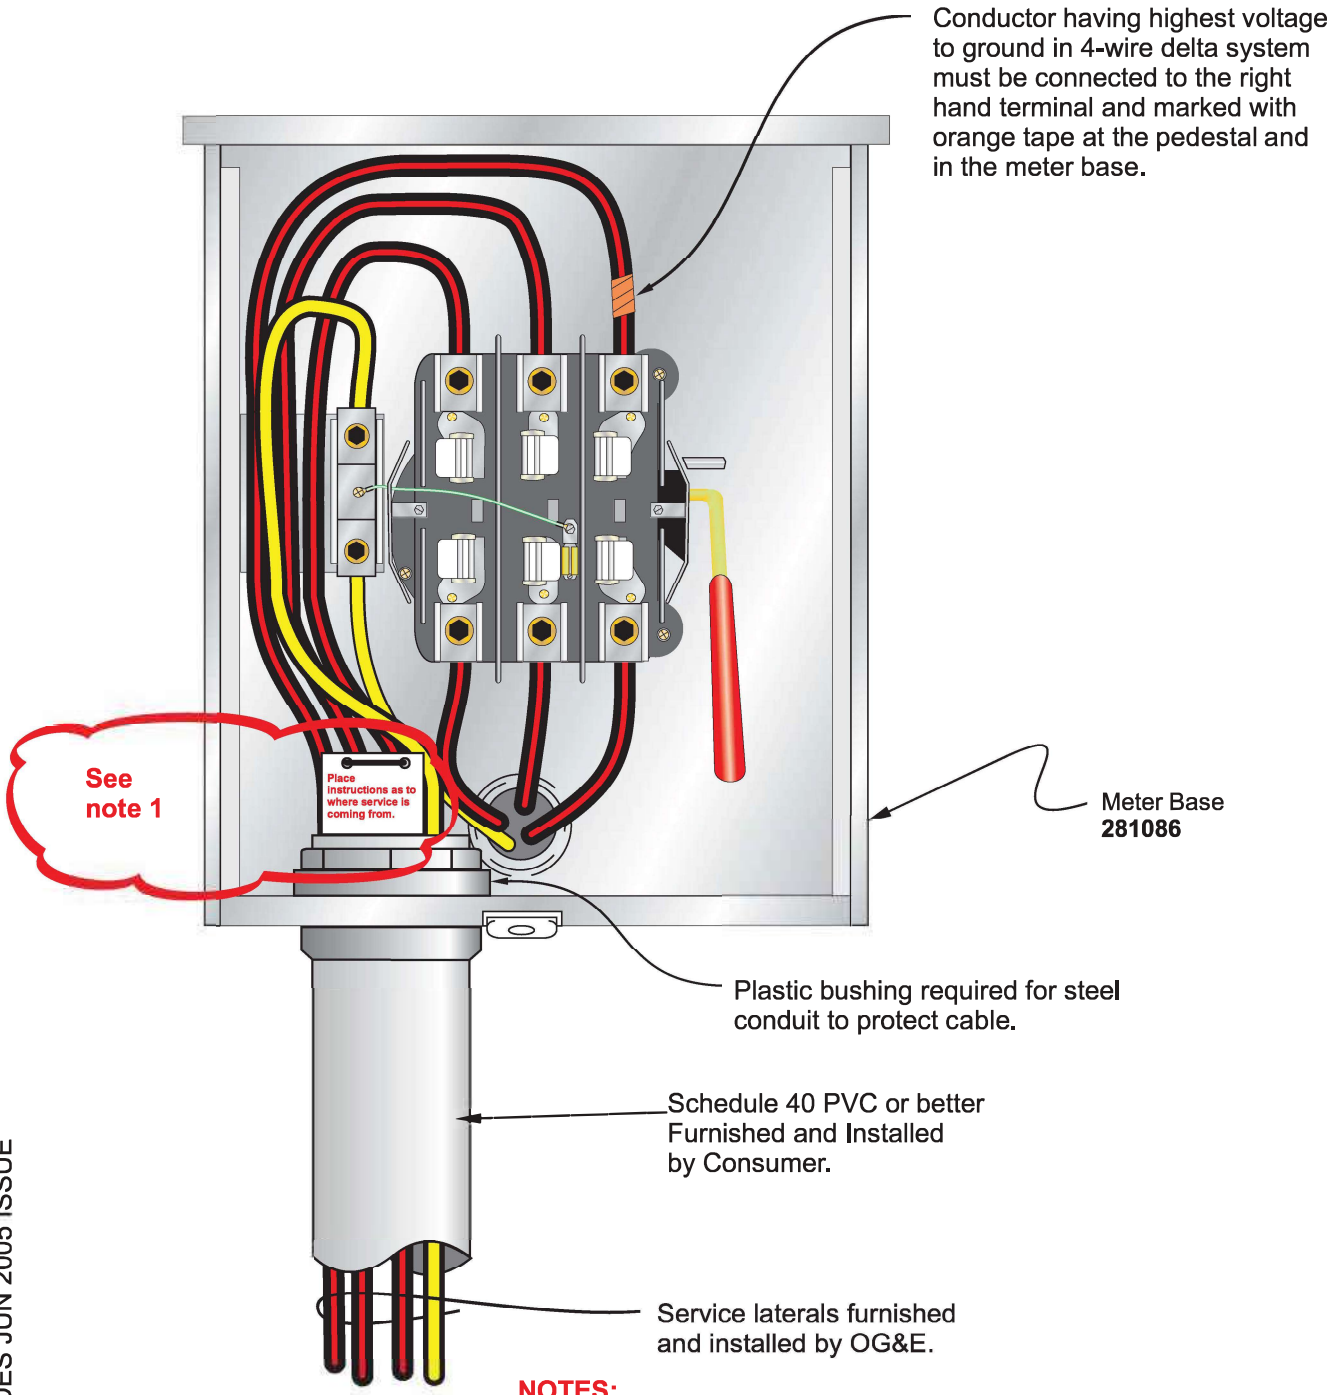

Conductor having highest voltage to ground in 4-wire delta system must be connected to the right hand terminal and marked with orange tape at the pedestal and in the meter base.

See note 1

Place instructions as to where service is coming from.

Meter Base 281086

Plastic bushing required for steel conduit to protect cable.

Schedule 40 PVC or better
Furnished and Installed
by Consumer.

Service laterals furnished
and installed by OG&E.

- NOTES:**
1. Place identifying tag on service conductors with information relating to where service is coming from (pedestal, transformer, pipe or no pipe under driveway.) Refer to U16

CONNECTION DIAGRAM
FOR SELF-CONTAINED THREE PHASE FOUR WIRE METER
208Y/120 OR 240Δ/120 VOLT **200-AMPERE MAXIMUM**